


HQS-5050-60LED-19.2W-RGBW-24V series

Professional LED strip LED 24V, 19.2W/m

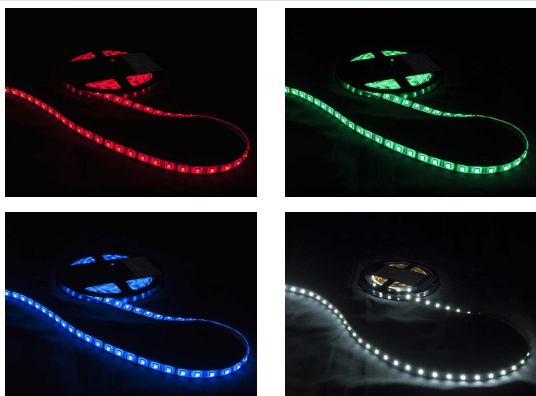

- Applications:
- Curve line lighting
 - Freeze lighting
 - Light bar applications

- Features:
- 2oz thickness FPC(Flexible Printed Circuit)
 - Can be cut every 5cm segment(3 LEDs in segment)
 - Each segment with couple pads for secondary operation
 - Enhanced 5050 LEDs
 - Easy installation with 3M adhesive tape

◎ MODEL ENCODING

HQS	-	5050	-	60 LED	-	19.2W	-	RGBW	-	24V
Series	-	LED Chip	-	Led/m	-	Power per 1m	-	Led Color Temperatura	-	Voltage

◎ ELECTRICAL SPECIFICATION


MODEL	HQS-5050-60LED-19.2W-RGBW-24V			
Chip	5050			
Supply voltage	24V ± 0.5VDC			
Current and Power per 1m	800mA; 19.2W			
Current and Power per reel (5m)	8A; 96W			
CCT (Correlated Color Temperature) / Wavelength	R : 620nm ÷ 630nm	G : 520nm ÷ 530nm	B : 460nm ÷ 470nm	W : 2800K ÷ 3500K
Stream of light	210lm ÷ 230lm / W	230lm ÷ 250lm / W	70lm ÷ 90lm / W	280lm ÷ 306lm / W
Maximum length for one sided supply	5m			
IP protection degree	IP33			
Working and storage temperature	-25°C ÷ +50°C; -25°C ÷ +60°C			
Cut Section	50mm			
Connection wire	2xAWG20(0.52mm ²) stranded wire, length = 140mm; V+: red; V-: black			
Dimensions (L * W * H)	5000 * 12 * 1.2mm			
Packing	5m/roll(bag); 40pcs/ctn; ctn dimensions: 45x25x25.6cm			

HQS-5050-60LED-19.2W-RGBW-24V series

Professional LED strip LED 24V, 19.2W/m



© MECHANICAL SPECIFICATION

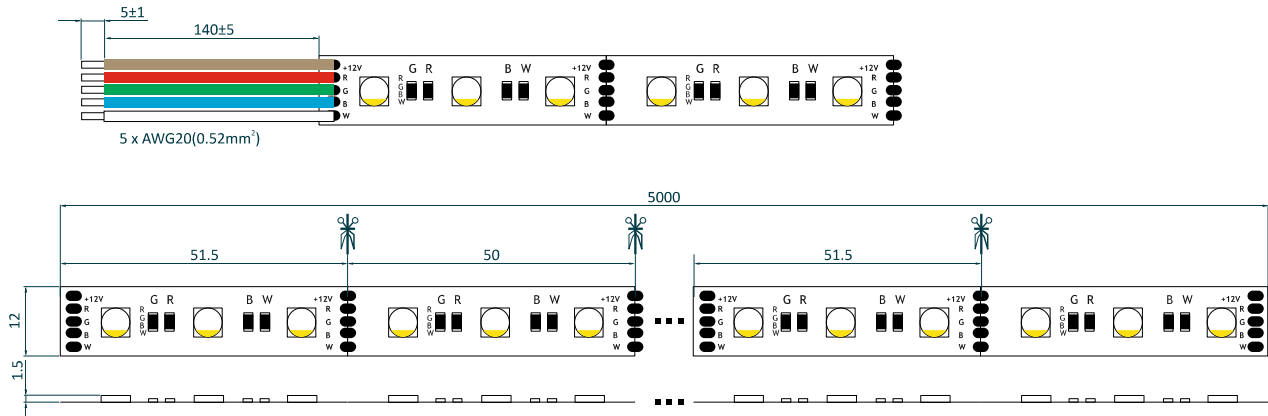

© SUPPLY

© Strip length < 5m

