

◆ **Features:**

- beam angle 12x55°
- for free connection
- IP 20 protection,
- built-in constant current circuit
- built-in heat skin plate
- 5 years warranty

◆ **Applications:**

- light boxes
- double-side light box from 100 to 300mm
- single-side light box from 80 to 150mm

◆ **Photo:**

CE








# RB-3030-xW-LENS12x55

		RB-3030-3W-LENS12x55	RB-3030-5W-LENS12x55	RB-3030-6W-LENS12x55
Power	Rated voltage	24Vdc +/- 5%		
	Power consumption	7,9W	13,2W	15W
	Current consumption of one module	0.32A	0.55A	0.625A
	Max QTY/Serie	10 pcs	6 pcs	5pcs
LEDs	Dimensions of LEDs	3030		
	Number of diodes in module	3	5	6
	Color of Light	W-white (6000-8000K) Typical 7000K		
	Flux	W- 610 lm	W- 1020 lm	W- 1200 lm
	Luminous efficacy	77 lm/W		
	Beam angle	12x55°		
	Lifetime	50 K hours		
Properties	Protection	IP 20		
	Working temperature	-25°C ... +55°C		
Dimensions	Height, width, length	25 x 210 mm	25 x 350 mm	25 x 420 mm
Montage	Bonding	Yes		
	Screwing	Yes		
	Hole size	M3		
Others	Housing material	Aluminium		
	Number of modules per 1mb	5 pcs	3 pcs	2 pcs
	Distance between LEDs	70mm		
Packing	Dimensions	52 x 30 24 cm	52 x 30 x 24 cm	40 x 25 x 23cm
	Box	200 pcs.	100 pcs.	100 pcs.

## ◆ DIMENSIONS

Dimensions: mm

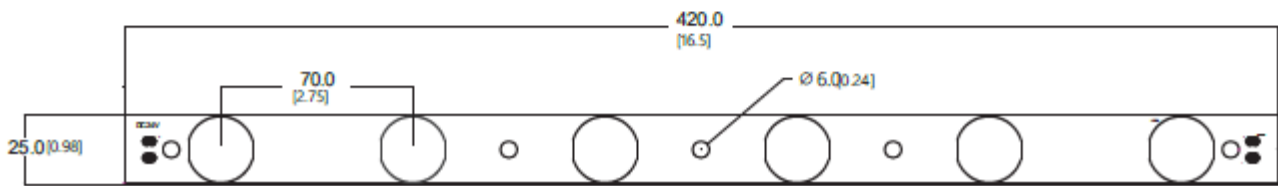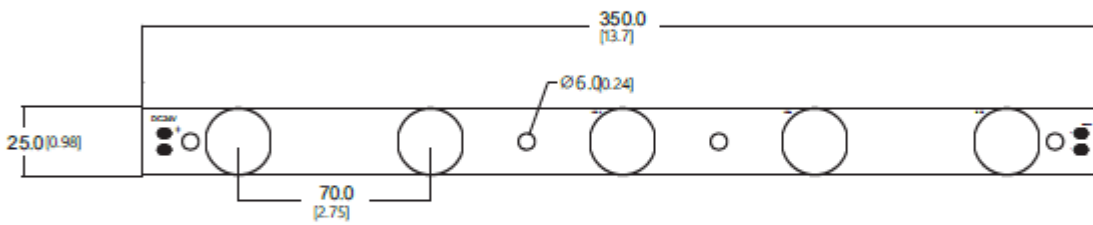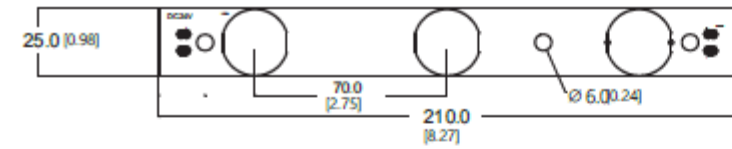

## ◆ BEAM ANGLE

