

◆ **Features:**

- beam angle 10x40°
- for free connection
- IP 33 protection,
- built-in constant current circuit
- built-in heat skin plate
- 5 years warranty

◆ **Applications:**

- light boxes
- double-side light box from 60 to 80mm
- single-side light box from 80 to 100mm

◆ **Photo:**






# RB-3030-10W-LENS10x40

		RB-3030-10W-LENS10x40
Power	Rated voltage	24Vdc +/- 5%
	Power consumption	21W
	Current consumption of one module	0.875A
	Max QTY/Serie	10 pcs
LEDs	Dimensions of LEDs	3030
	Q-ty of diodes in module	10
	Color of Light	W-white (6000-7000K) Typical 7000K
	Flux	W- 2100 lm
	Luminous efficacy	100 lm/W
	Beam angle	10x40°
	Lifetime	50 000 hours
Properties	Protection	IP 33
	Working temperature	-25°C ... +55°C
Dimensions	Height, width, length	25,5 x 500 mm
Montage	Bonding	Yes
	Screwing	Yes
	Hole size	M3
Others	Housing material	Aluminium
	Number of modules per 1mb	2 pcs
	Distance between LEDs	50mm
Packing	Dimensions	
	Box	

### ◆ DIMENSIONS

Dimensions: mm

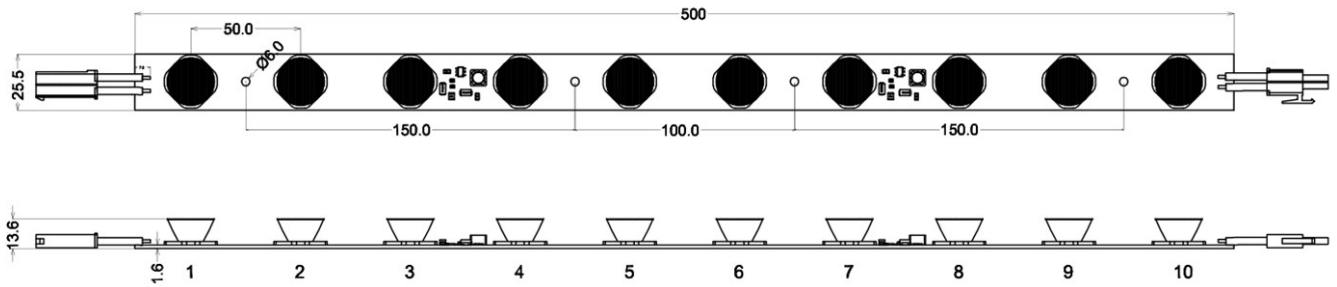

### ◆ BEAM ANGLE

