




# HQS-9.6W-120LED-W-WP-24V

Professional Led Strip, 9.6 W/m

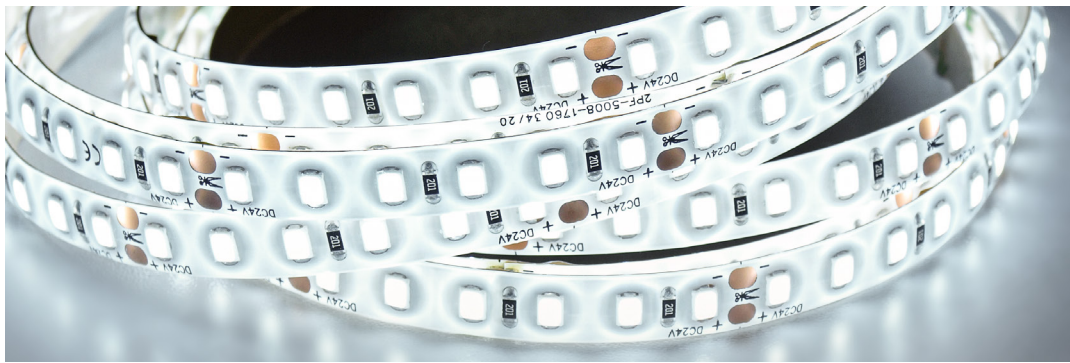


## TECHNICAL DETAILS

|                                     |   |
|-------------------------------------|---|
| SUPPLY VOLTAGE                      | 24 V ± 0.5 VDC  |
| POWER                               | 9.6 W/m   |
| CURRENT                             | 0.4 A/m   |
| POWER PER REEL (5M)                 | 48 W  |
| COLOR TEMPERATURE                   | 6500K   |
| BEAM ANGLE                          | 120°  |
| LUMINOUS FLUX PER METER             | 1040 lm   |
| CRI                                 | 80  |
| MAXIMUM LENGTH FOR ONE SIDED SUPPLY | 5 m   |
| IP PROTECTION DEGREE                | IP64  |
| WORKING TEMPERATURE                 | -25°C ~ 50°C  |
| STORAGE TEMPERATURE                 | -25°C ~ 60°C  |
| LED QTY (PER METER)                 | 120 LEDs/m  |
| WIDTH PCB                           | 8 mm  |
| CUT SECTION                         | 50 mm   |
| CONNECTION WIRE                     | 2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 140 mm: V+: red: V:-black |
| DIMENSIONS (L * W * H)              | 5000 x 8 x 1.26 mm  |
| PACKING                             | 5 m / roll (bag); 60 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm                   |

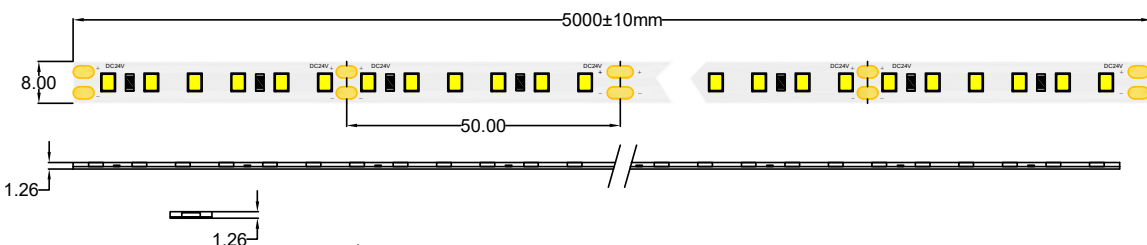

**MW LIGHTING**  
HQS-9.6W-120LED-W-WP-24V

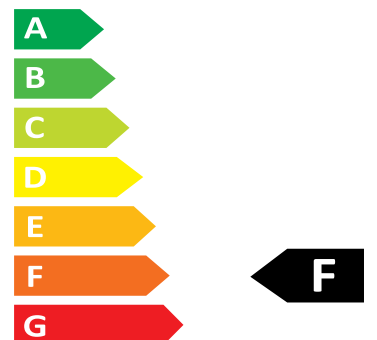


CONNECTORS PCB Width 8 mm



CLICK-8A-WP



CLICK-8B-WP



CLICK-8C-WP

**5**  
kWh/1000h



2019/2015