



HQS-6W-60LED-NW-12V

Professional Led Strip, 6 W/m



TECHNICAL DETAILS

| | |
|-------------------------------------|---|
| SUPPLY VOLTAGE | 12 V ± 0.5 VDC |
| POWER | 6 W/m |
| CURRENT | 0.5 A/m |
| POWER PER REEL (5M) | 30 W |
| COLOR TEMPERATURE | 4000K |
| BEAM ANGLE | 120° |
| LUMINOUS FLUX PER METER | 640 lm |
| CRI | 80 |
| MAXIMUM LENGTH FOR ONE SIDED SUPPLY | 5 m |
| IP PROTECTION DEGREE | IP33 |
| WORKING TEMPERATURE | -25°C ~ 50°C |
| STORAGE TEMPERATURE | -25°C ~ 60°C |
| LED QTY (PER METER) | 60 LEDs/m |
| WIDTH PCB | 8 mm |
| CUT SECTION | 50 mm |
| CONNECTION WIRE | 2 x AWG20 (0.52 mm ²) stranded wire, length = 140 mm: V+: red: V:-black |
| DIMENSIONS (L * W * H) | 5000 x 8 x 1.2 mm |
| PACKING | 5 m /roll (bag); 60 pcs / ctn; ctn dimensions: 45 x 45 x 26.5 cm |

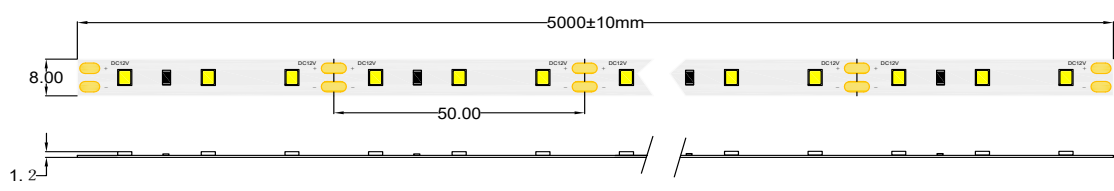


CONNECTORS PCB Width 8 mm



CLICK-8A



CLICK-8B




CLICK-8C



MW LIGHTING

HQS-6W-60LED-NW-12V

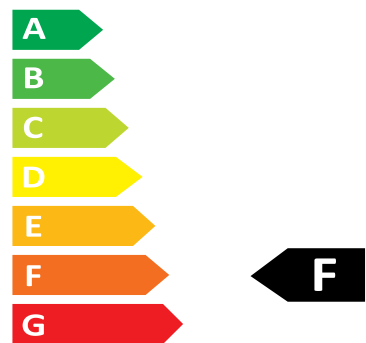

3 kWh/1000h



2019/2015