


# HQS-7.2W-30LED-RGB-WP-24V

Professional Led Strip, 7.2 W/m




## TECHNICAL DETAILS

SUPPLY VOLTAGE	24 V ± 0.5 VDC
POWER	7.2 W/m
CURRENT	0.3 A/m
POWER PER REEL (5M)	36 W
WAVELENGTH RANGE	R: 620 - 630 nm, G: 520 - 530 nm, B: 460 - 470 nm
BEAM ANGLE	120°
LUMINOUS FLUX PER METER	R: 8.33 - 10.42 lm, G: 29.17 - 35.84 lm, B: 5 - 6.25 lm
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP64
WORKING TEMPERATURE	-25°C ~ 50°C
STORAGE TEMPERATURE	-25°C ~ 60°C
LED QTY (PER METER)	30 LEDs/m
WIDTH PCB	10 mm
CUT SECTION	168 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 140 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5000 x 10 x 2 mm
PACKING	5 m /roll (bag); 60 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm

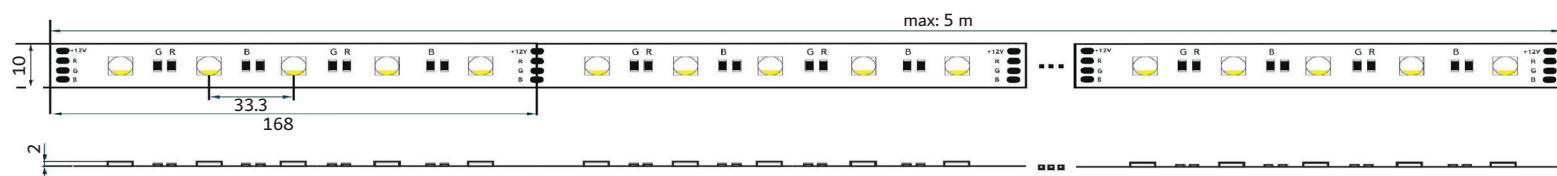


CONNECTORS PCB Width 10 mm

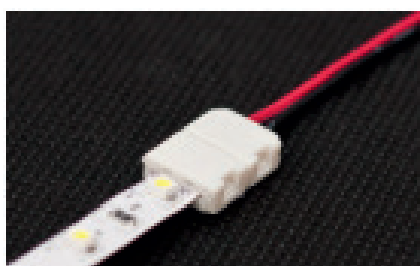

CLICK-10A



CLICK-10B

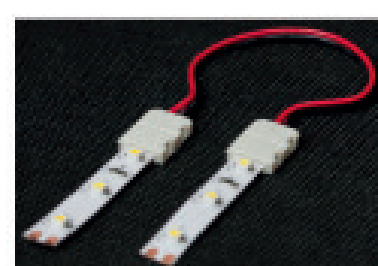

CLICK-10C