



# HQS-9.6W-120LED-NW-WP-24V

Professional Led Strip, 9.6 W/m

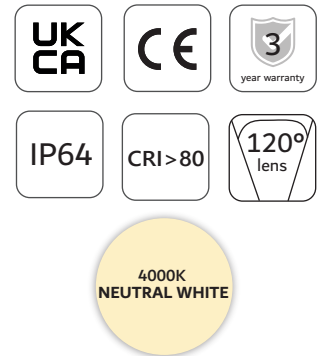

## TECHNICAL DETAILS

SUPPLY VOLTAGE	24 V ± 0.5 VDC
POWER	9.6 W/m
CURRENT	0.4 A/m
POWER PER REEL (5M)	48 W
COLOR TEMPERATURE	4000K
BEAM ANGLE	120°
LUMINOUS FLUX PER METER	1000 lm
CRI	80
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP64
WORKING TEMPERATURE	-25°C ~ 50°C
STORAGE TEMPERATURE	-25°C ~ 60°C
LED QTY (PER METER)	120 LEDs/m
WIDTH PCB	8 mm
CUT SECTION	50 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 140 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5000 x 8 x 1.26 mm
PACKING	5 m /roll (bag); 60 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm

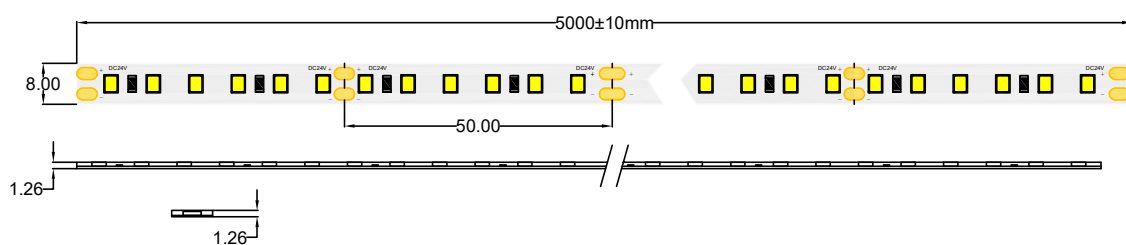


CONNECTORS PCB Width 8 mm



CLICK-8A-WP




CLICK-8B-WP



CLICK-8C-WP



**MW LIGHTING**  
HQS-9.6W-120LED-NW-WP-24V

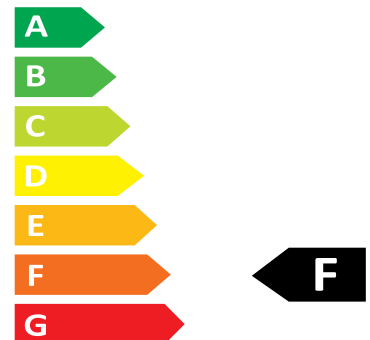

**5**  
kWh/1000h



2019/2015