
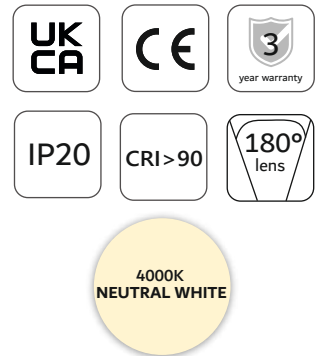


UQS-COB-8W-NW-12V

Professional Led Strip, 8 W/m

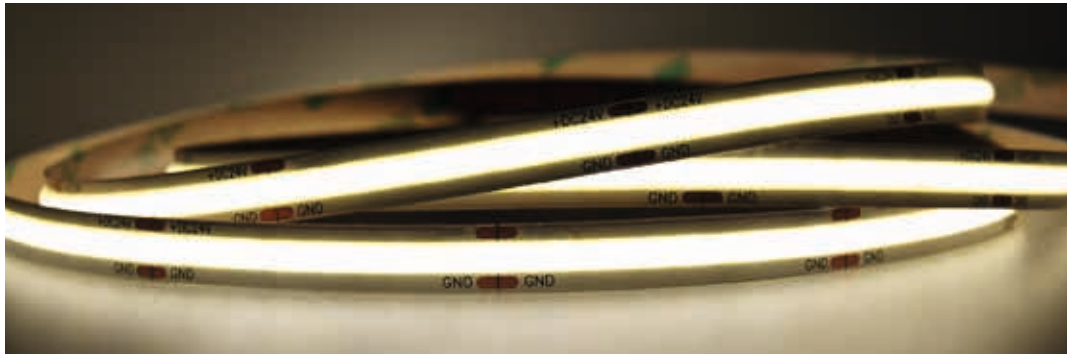


TECHNICAL DETAILS

SUPPLY VOLTAGE	12 V ± 0.5 VDC
POWER	8 W/m
CURRENT	0.66 A/m
POWER PER REEL (5M)	40 W
COLOR TEMPERATURE	4000K
BEAM ANGLE	180°
LUMINOUS FLUX PER METER	780 lm
CRI	90
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP20
WORKING TEMPERATURE	-20°C ~ 50°C
STORAGE TEMPERATURE	-30°C ~ 80°C
LED QTY (PER METER)	320 LEDs/m
WIDTH PCB	8 mm
CUT SECTION	25 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm ²) stranded wire, length = 360 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5004 x 8 x 2.2 mm
PACKING	5 m /roll (bag); 50 pcs / ctn; ctn dimensions: 45 x 45 x 26.5 cm



MW LIGHTING

UQS-COB-8W-NW-12V

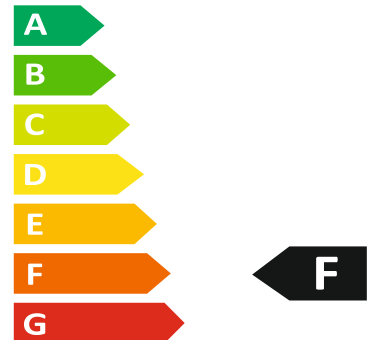

CONNECTORS PCB Width 8 mm



UQS-COB-8W-SS



UQS-COB-8W-CS

4
kWh/1000h



2019/2015