


HQS-COB-10W-X Series

LED24V professional tape, 10W/m

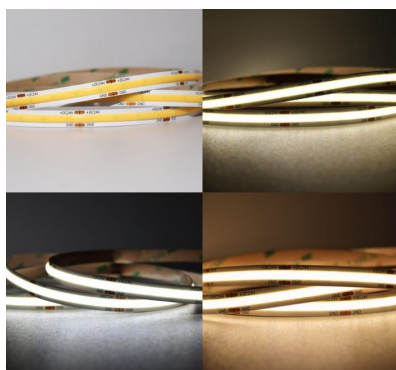

■ Application:

- Kitchen lighting
- Conference lighting
- Sign lighting
- Interior lighting of buildings

■ Features:

- Uniform lighting
- Easy installation and maintenance
- Elastic strap
- Angle of light diffusion (180°)
- Uniform light line and high luminous intensity

◎ MODEL VERSIONS

HQS	-	COB	-	10W	-	X
Seria	-	Chip LED on board	-	Power per 1m	-	Colour
					-	X = W 6 500k
					-	X = NW 4 000k
					-	X = WW 3 000k
					-	X = WW2k7 2 700k

◎ ELECTRICAL SPECIFICATION

MODEL	HQS-COB-10W-W	HQS-COB-10W-NW	HQS-COB-10W-WW	
LED type			COB	
Number of diodes per 1m			512	
Supply voltage			24V DC	
Current and power consumption / 1m			420mA; 10W	
Current and power consumption / roll (5m)			2.1A 50W	
Colour temperature	6 500k	4 500k	3 000k	2 700k
Colour temperature range	6 000k ÷ 8 000k	4 000k ÷ 5 000k	2 700k ÷ 3 400k	2 600k ÷ 2 800k
Lighting angle			180 °	
Luminous flux (lm/W) [1mb]			120	
Luminous flux (lm/m)			1 200	
CRI			CRI ≥ 90	
Segmented cutting section			62.5mm	
Dimensions (L * W * H)			5000 * 8 * 1.5mm	

◎ WORKING ENVIRONMENT

IP protection class	IP33
Operating temperature	-25°C ÷ +45°C
Storage temperature	-25°C ÷ +80°C

◎ PACKAGING


Quantity (m/package)	5
Quantity (pack/carton)	60

HQS-COB-10W-X Series

LED24V professional tape, 10W/m



© MECHANICAL SPECIFICATION

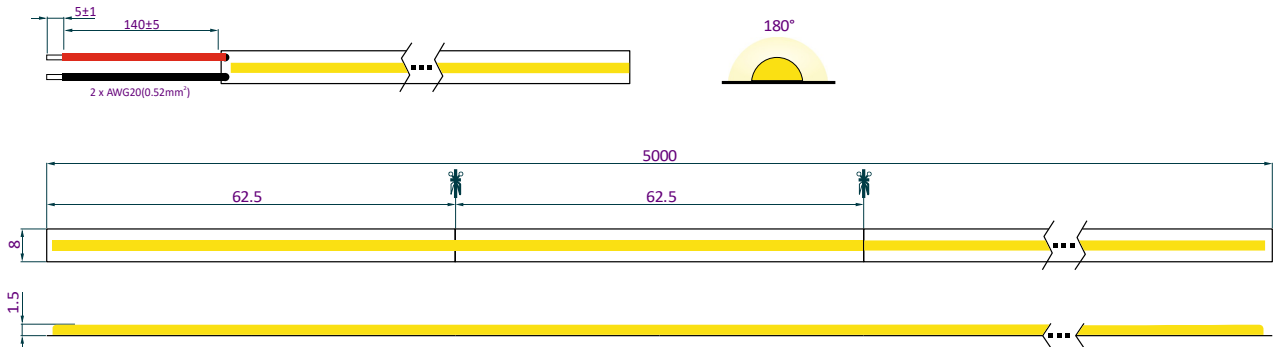

© ZASILANIE

