
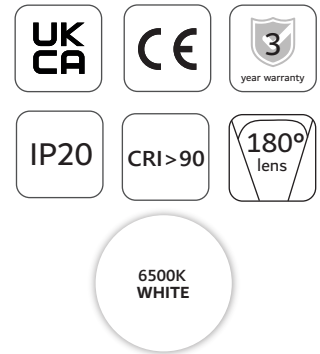



# UQS-COB-12W-W-24V

Professional Led Strip, 12 W/m

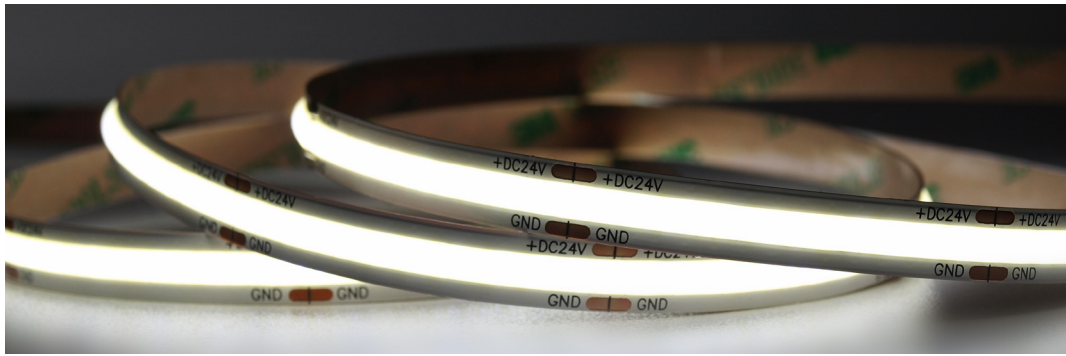

## TECHNICAL DETAILS


SUPPLY VOLTAGE	24 V ± 0.5 VDC
POWER	12 W/m
CURRENT	0.5 A/m
POWER PER REEL (5M)	60 W
COLOR TEMPERATURE	6500K
BEAM ANGLE	180°
LUMINOUS FLUX PER METER	1160 lm
CRI	90
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP20
WORKING TEMPERATURE	-20°C ~ 50°C
STORAGE TEMPERATURE	-30°C ~ 80°C
LED QTY (PER METER)	480 LEDs/m
WIDTH PCB	10 mm
CUT SECTION	50 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 360 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5004 x 10 x 2.2 mm
PACKING	5 m /roll (bag); 50 pcs / ctn; ctn dimensions: 45 x 45 x 26.5 cm

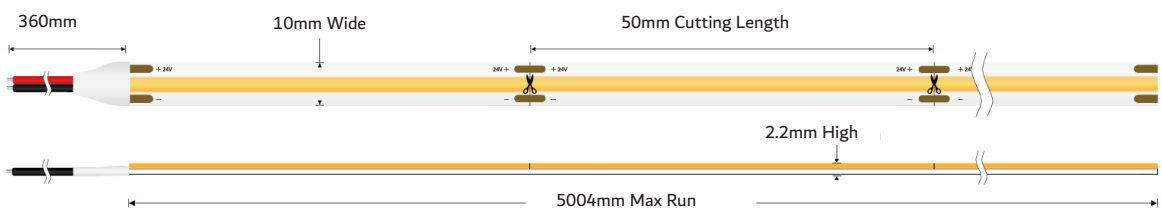

CONNECTORS PCB Width 10 mm



UQS-COB-12W-SS

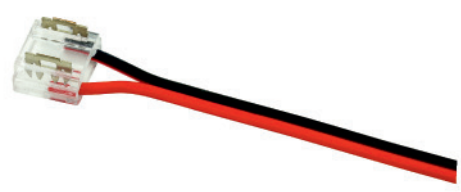

UQS-COB-12W-CS

**ENERGY**  
MW LIGHTING  
UQS-COB-12W-W-24V

A  
B  
C  
D  
E  
F  
G

6 kWh/1000h



2019/2015